

NVR-E04-1A

Network Video Recorder



قابلیت های کلیدی

- خروجی همزمان HDMI و VGA
- پشتیبانی از 1 عدد هارد تا 10 ترابایت
- قابلیت بروزرسانی آنلاین


- پشتیبانی از فرمت های تصویر Ultra265/H.265/H.264
- 4 کانال تصویر ورودی تا رزولوشن 2 مگاپیکسل
- پشتیبانی از دوربین های با پروتکل ONVIF

Specifications

IP Video Input	4-ch
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	40Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	4-ch
Corridor Mode Screen	3/4

Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 1080p@20, 4 x 720p@30
SATA	1 SATA interface
Capacity	up to 10TB for each disk
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Front panel: 1 x USB2.0; Rear panel: 1 x USB2.0
Power Supply	12V DC
	Power Consumption: ≤3.2 W (without HDD)
Working Environment	-10°C~+55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2"×9.4"×1.8")
Weight (without HDD)	0.9kg (1.98lb)

Dimensions

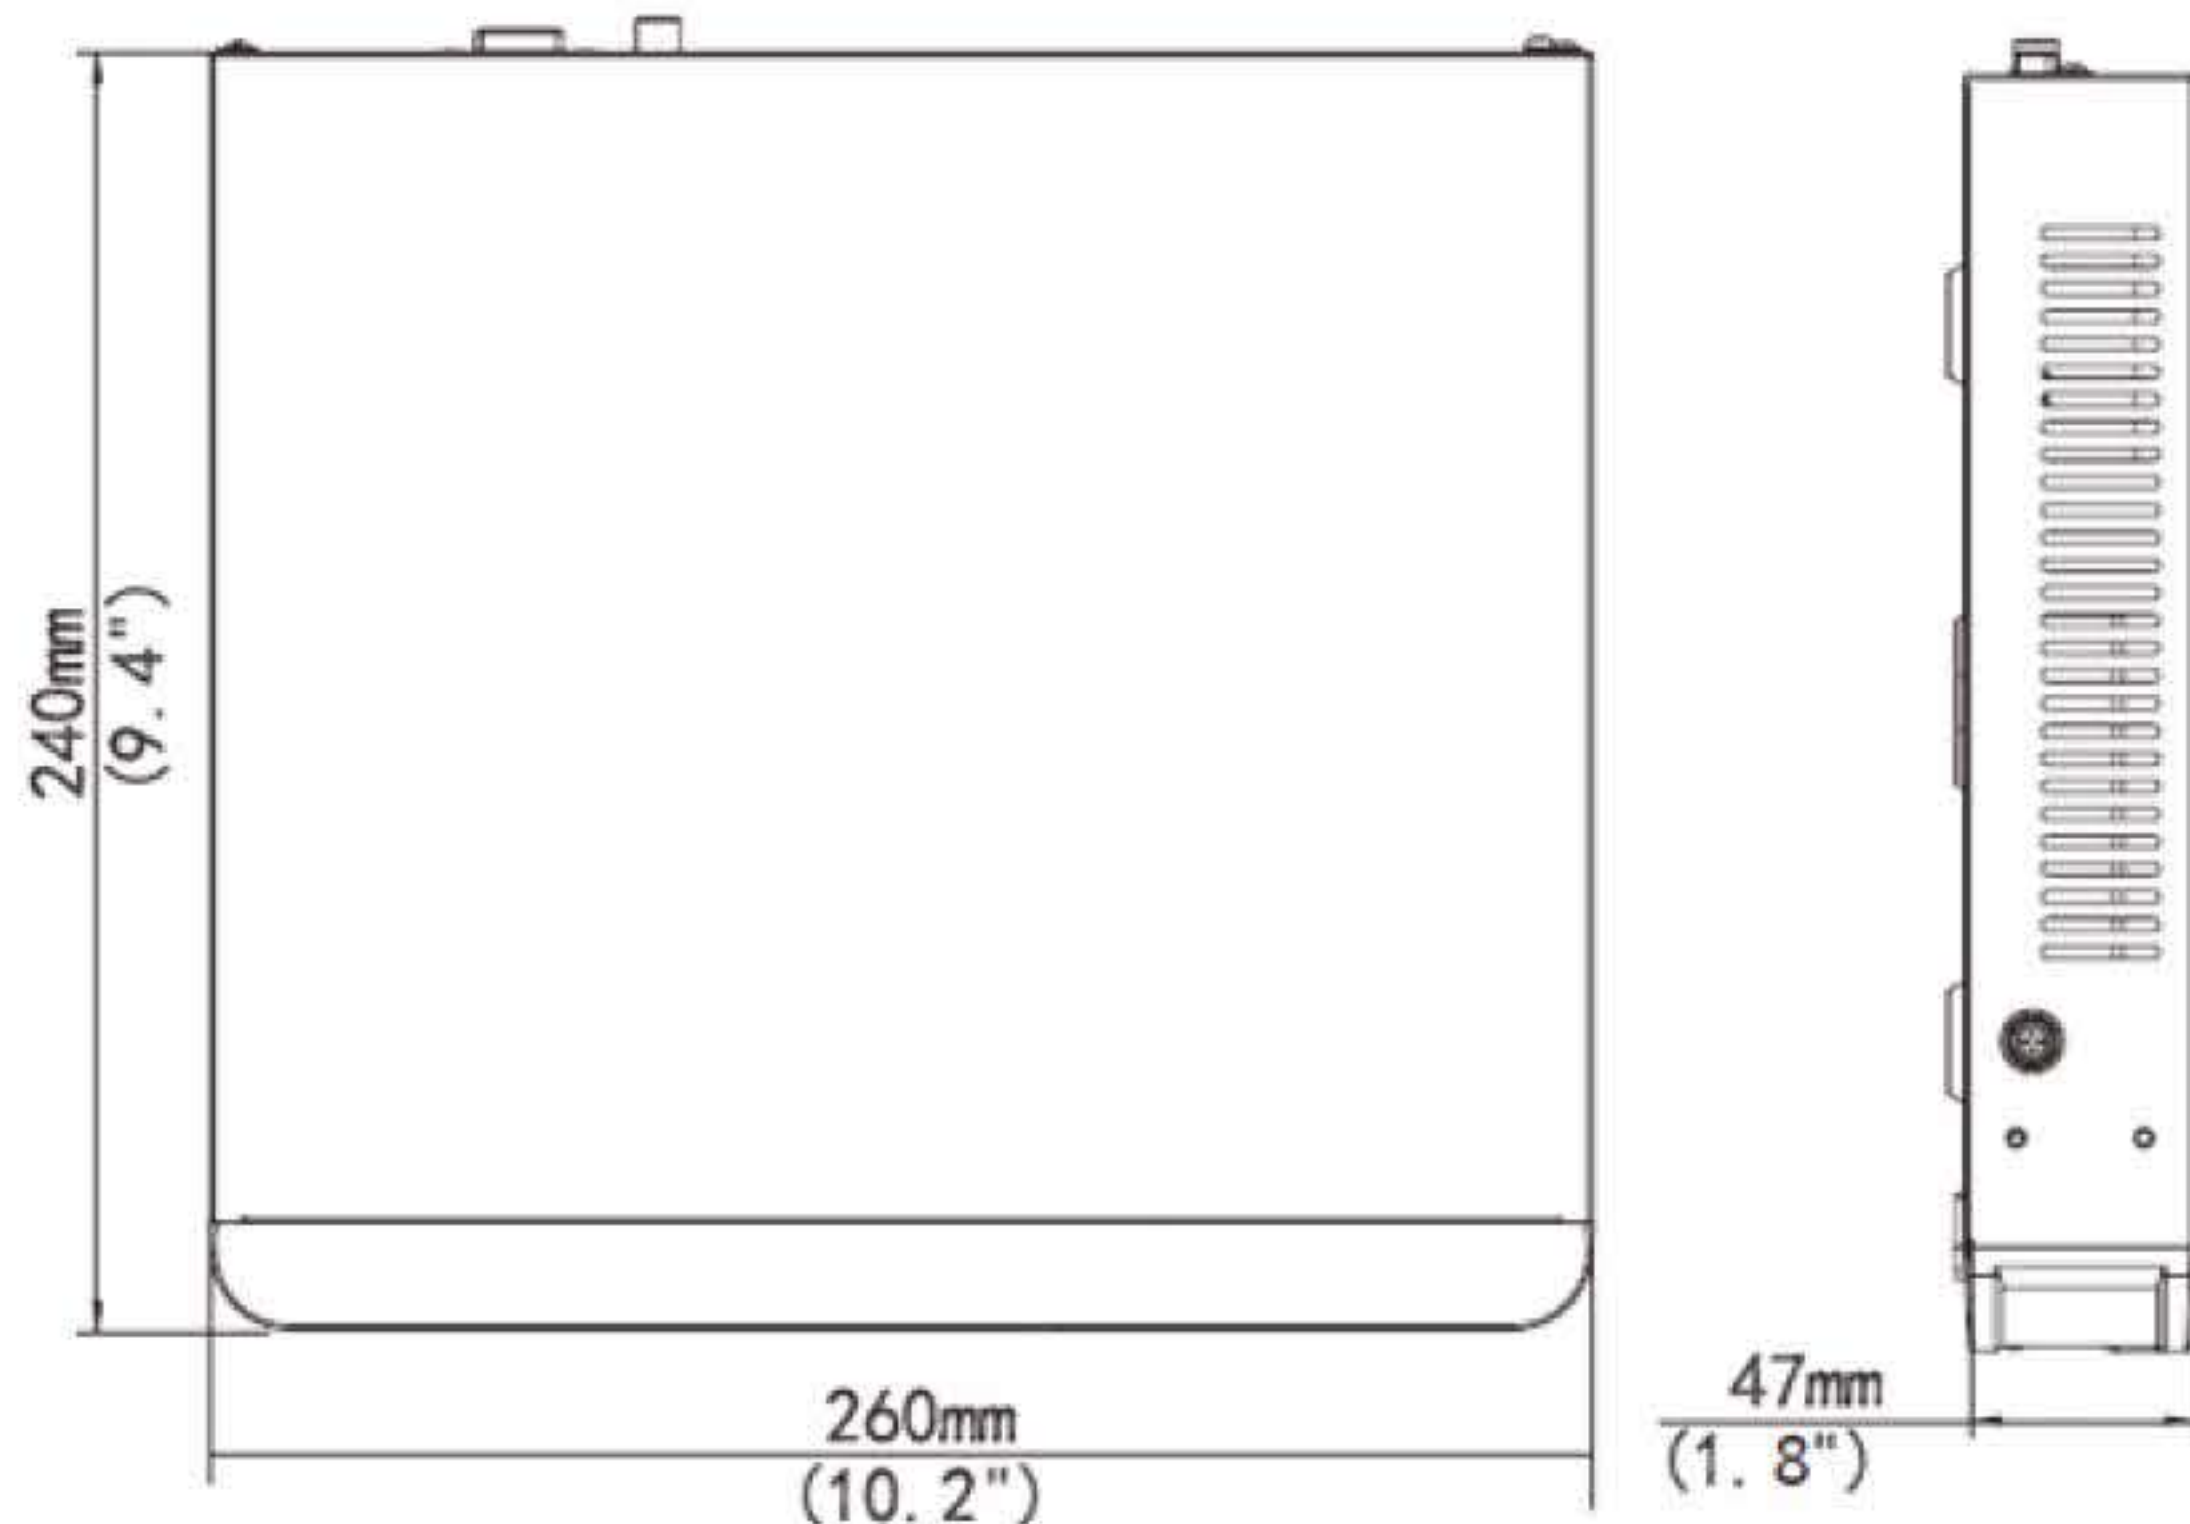

Rear Panel

